

SOT-23 Plastic-Encapsulate Transistors

2SC5692 Transistor Silicon NPN Epitaxial Type

High-Speed Switching Applications

DC-DC Converter Applications

Strobe Applications


- High DC current gain: $h_{FE} = 400$ to 1000 ($I_C = 0.3$ A)
- Low collector-emitter saturation voltage: $V_{CE(sat)} = 0.14$ V (max)
- High-speed switching: $t_f = 120$ ns (typ.)

Maximum Ratings ($T_a = 25^\circ\text{C}$)

Characteristics		Symbol	Rating	Unit
Collector-base voltage		V_{CBO}	100	V
Collector-emitter voltage		V_{CEX}	80	V
Collector-emitter voltage		V_{CEO}	50	V
Emitter-base voltage		V_{EBO}	7	V
Collector current	DC	I_C	2.5	A
	Pulse	I_{CP}	4.0	
Base current		I_B	250	mA
Collector power dissipation	DC	P_C	625	mW
	$t = 10$ s	(Note)	1000	
Junction temperature		T_j	150	$^\circ\text{C}$
Storage temperature range		T_{stg}	-55 to 150	$^\circ\text{C}$

Note: Mounted on FR4 board (glass epoxy, 1.6 mm thick, Cu area: 645 mm²)

SOT-23



1. BASE

2. EMITTER


3. COLLECTOR

Marking: WB

Electrical Characteristics ($T_a = 25^\circ\text{C}$)

Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit
Collector cut-off current		I_{CBO}	$V_{CB} = 100$ V, $I_E = 0$	—	—	100	nA
Emitter cut-off current		I_{EBO}	$V_{EB} = 7$ V, $I_C = 0$	—	—	100	nA
Collector-emitter breakdown voltage		$V_{(BR)CEO}$	$I_C = 10$ mA, $I_B = 0$	50	—	—	V
DC current gain		$h_{FE}(1)$	$V_{CE} = 2$ V, $I_C = 0.3$ A	400	—	1000	
		$h_{FE}(2)$	$V_{CE} = 2$ V, $I_C = 1$ A	200	—	—	
Collector-emitter saturation voltage		$V_{CE(sat)}$	$I_C = 1$ A, $I_B = 20$ mA	—	—	0.14	V
Base-emitter saturation voltage		$V_{BE(sat)}$	$I_C = 1$ A, $I_B = 20$ mA	—	—	1.10	V
Collector output capacitance		C_{ob}	$V_{CB} = 10$ V, $I_E = 0$, $f = 1$ MHz	—	13	—	pF
Switching time	Rise time	t_r	See Figure 1 circuit diagram. $V_{CC} \approx 30$ V, $R_L = 30 \Omega$ $I_{B1} = -I_{B2} = 33.3$ mA	—	40	—	ns
	Storage time	t_{stg}		—	500	—	
	Fall time	t_f		—	120	—	



Typical Characteristics

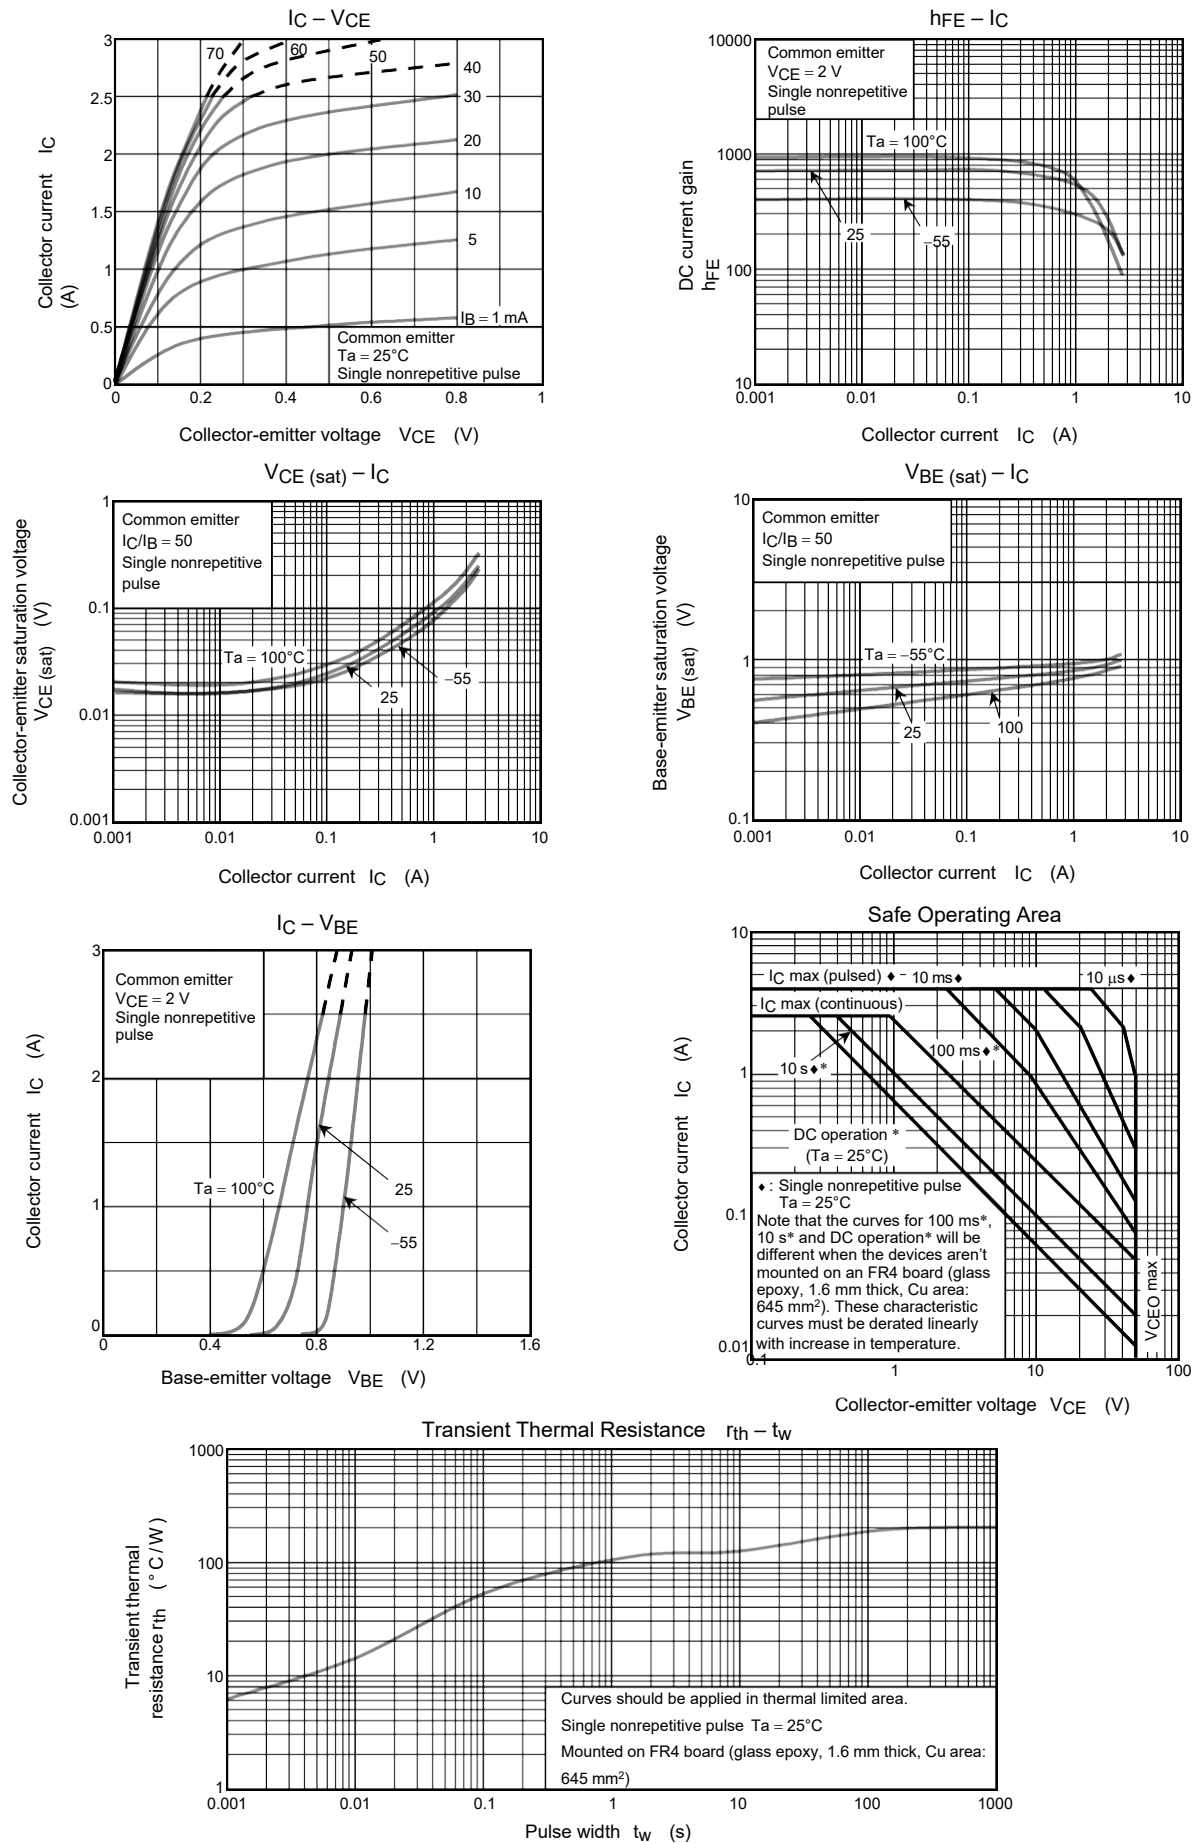

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

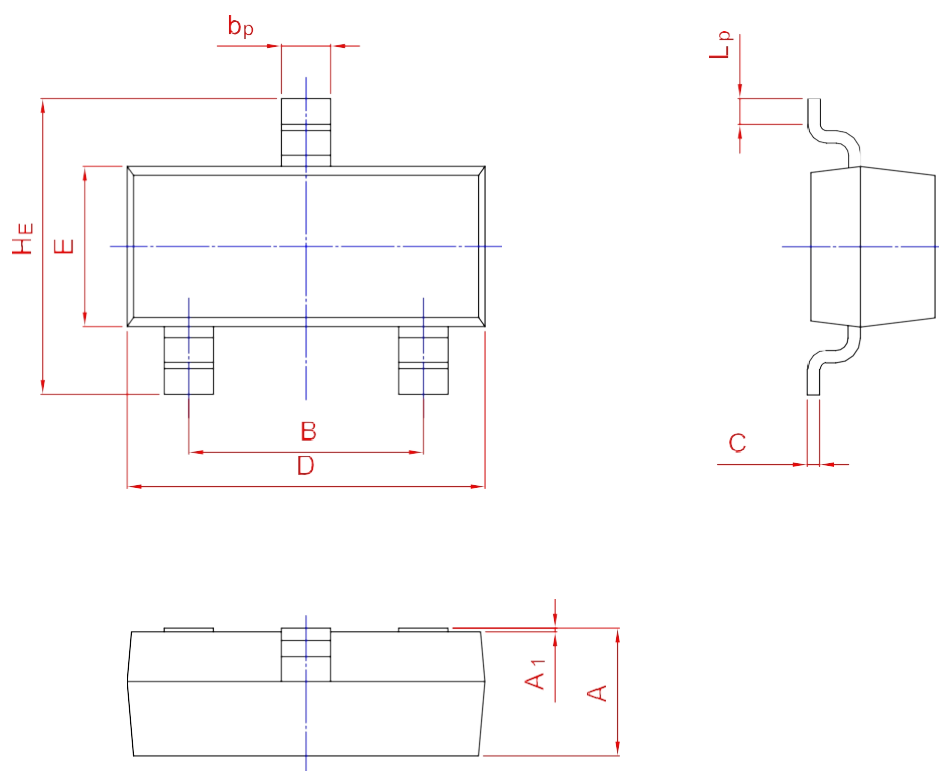

UNIT	A	B	b _p	C	D	E	H _E	A ₁	L _p
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20