

SOT-23 Plastic-Encapsulate Voltage Regulators


79L24 Three-terminal positive voltage regulator

FEATURES

Maximum Output current I_O : 0.1 A

Output voltage V_O : -24 V

Continuous total dissipation P_D : 0.35 W ($T_a=25^\circ C$)

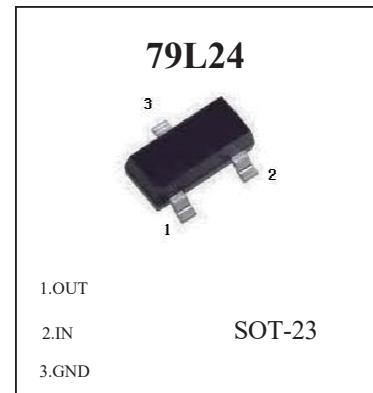

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies)


Parameter	Symbol	Value	Unit
Input Voltage	V_I	-40	V
Operating Junction Temperature Range	T_{OPR}	0-150	°C
Storage Temperature Range	T_{STG}	-65-150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i=-33V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Output voltage	V_o		25°C	-23.0	-24.0	-25.0	V
		$-27V \leq V_i \leq -38V, I_o = 1mA \sim 40mA$	0-125°C	-22.8	-24.0	-25.2	V
		$I_o = 1mA \sim 70mA$		-22.8	-24.0	-25.2	V
Load Regulation	ΔV_o	$I_o = 1mA \sim 100mA$	25°C		40	200	mV
		$I_o = 1mA \sim 40mA$	25°C		25	100	mV
Line regulation	ΔV_o	$-27V \leq V_i \leq -38V$	25°C		90	350	mV
		$-28V \leq V_i \leq -38V$	25°C		75	300	mV
Quiescent Current	I_q		25			6.5	mA
Quiescent Current Change	ΔI_q	$-28V \leq V_i \leq -38V$	0-125°C			1.5	mA
	ΔI_q	$1mA \leq I_o \leq 40mA$	0-125°C			0.1	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz$	25°C		200		μV
Ripple Rejection	RR	$-29V \leq V_i \leq -35V, f = 120Hz$	0-125°C	31	47		dB
Dropout Voltage	V_d		25°C		1.7		V







* Pulse test.

TYPICAL APPLICATION

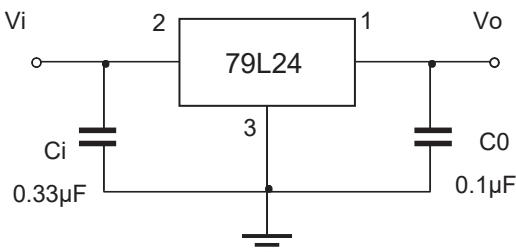

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.




Typical Characteristics

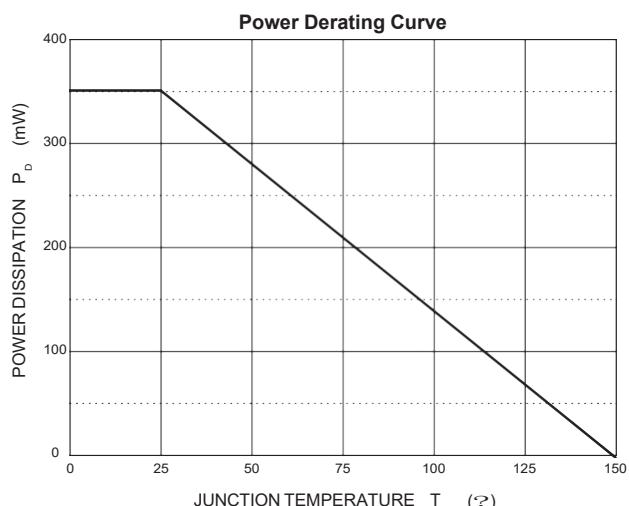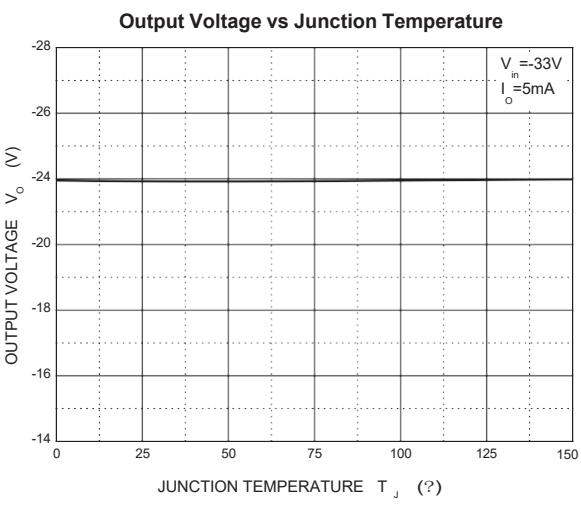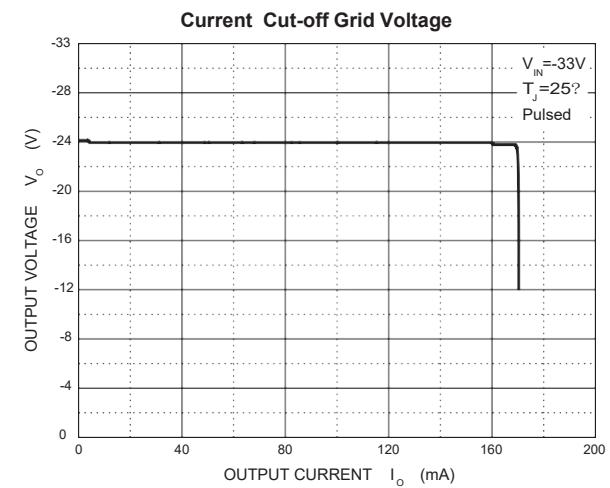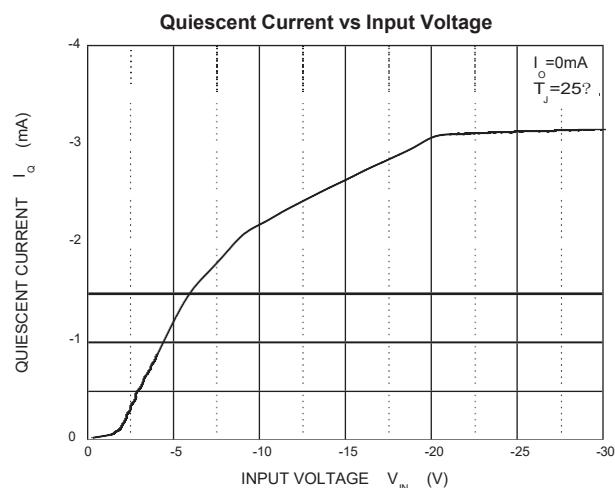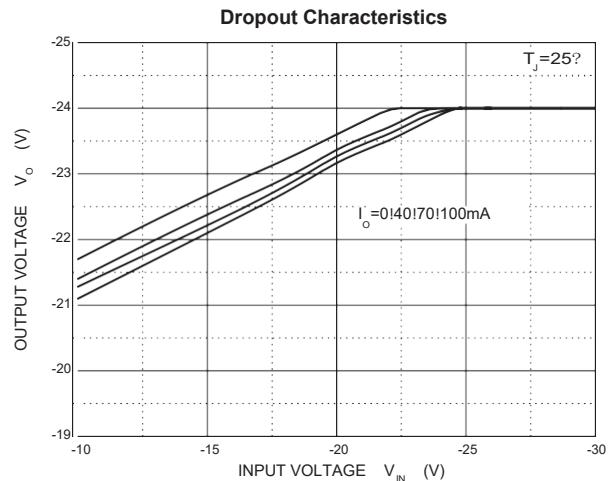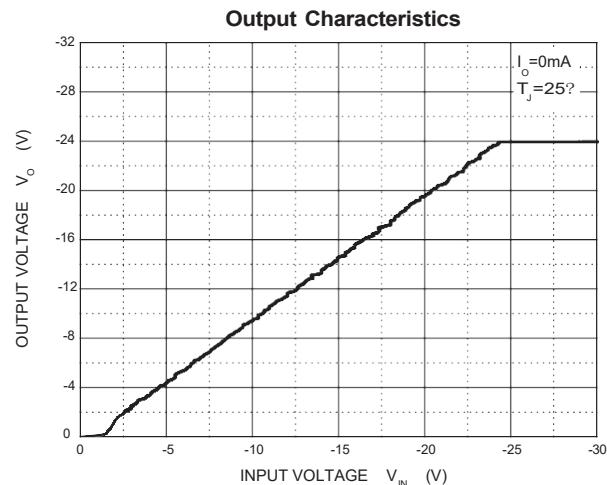

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

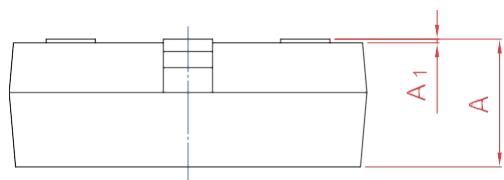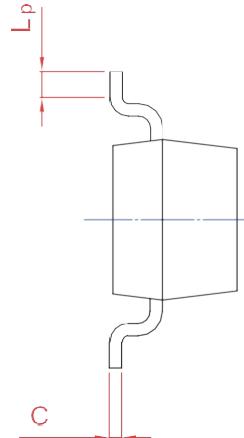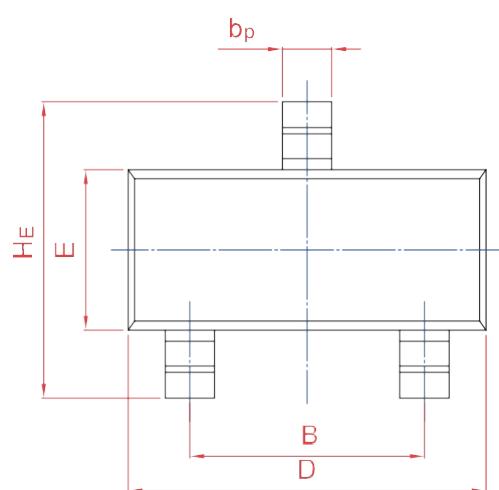

UNIT	A	B	b_p	C	D	H_E	A_1	L_p
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013
								0.50 0.20